

Products Description



La plupart des produits populaires 2015 100% vierge qualité remy cheveux russe des extensions de cheveux de bande

Matériel de cheveux:	100% des cheveux de vierge
Longueur des cheveux:	8 "à 36"
Couleur De Cheveux:	Noirs: # 1, # 1b # 2, # 6, # 8, Température de couleur: # 27, # 613, couleurs mélangées, ou comme demande du client
Style:	Directement, vague de corps, vague profonde, vague d'eau, jerry / boucle crépus, yaki ou selon les demandes du client ou des photos.
Poids:	À propos de 100g, 4 * 0.8cm par pièce, 40 pièces par ensemble
Paielements:	Petite quantité: Western Union, Paypal et Money Gram Pour en vrac: la Banque T / T

Emballage:	petite commande: emballer avec un sac en plastique et le carton / vrac Pour: selon votre exigences pour emballer avec votre marque et le logo
Le temps de production	Environ 5-7 jours, selon la quantité
Délai de livraison:	à propos de 2-5days, par UPS, DHL, Fedex
MOQ:	1 Set (échantillon afin Bienvenue à consulter notre qualité)

Tangle Test



Restle Test



Shedding Test



Washing Test & Hair Care



1. Wash the hair in one week, use mild shampoo, rinse and leave to dry.
2. Come with a wire brush after dry, the round with wide-toothed comb.
3. Don't make sure hair under the blazing sun for quite a long time.
4. Don't blows the root of hair too near with hair drier.
5. To daily hair caring, please spary the hydrating drops regularly, otherwise the hair will become dry, tangle and shedding

Dyeing Test



Burn Test



Human hair

VS



Chemical fiber hair

Burnig smells like a burnt fragrance, Human hair burns out very quickly, is also easily becomes ash.



AUTHORIZED CERTIFICATION



国家发制品及护发用品质量监督检验中心 National Hair Products And Hair Care Products Quality Supervision And Inspection Center 检验报告 Inspection Report

№ 20160206

第 2 页 共 4 页
Page 2 of 4

产品名称(Sample): 人发发套 (Human Hair Weaving)		规格型号(Model): 14"(1+ inch)				
序号 Serial	检验项目 Items	计量单位 Unit	标准要求 Requirements	检测结果 Results	判定结论 Conclusions	备注 Remarks
1	人发含量 (Human Hair Content)	%	≥98	100	合格 (Qualified)	/
2	甲醛 (Formaldehyde)	mg/kg	≤15	5	合格 (Qualified)	/
3	异味 (Off-flavor)	/	无异味 (None)	符合 (conform)	合格 (Qualified)	/
4	pH值	/	4.0~9.0	8.0	合格	/




国家发制品及护发用品质量监督检验中心 检验报告 Inspection Report						№ 20160206
产品名称(Sample): 人发发套 (Human Hair Weaving)						规格型号(Model): 14"(1+ inch)
序号 Serial	检验项目 Items	计量单位 Unit	标准要求 Requirements	检测结果 Results	判定结论 Conclusions	备注 Remarks
1	人发含量 (Human Hair Content)	%	≥98	100	合格 (Qualified)	/
2	甲醛 (Formaldehyde)	mg/kg	≤15	5	合格 (Qualified)	/
3	异味 (Off-flavor)	/	无异味 (None)	符合 (conform)	合格 (Qualified)	/
4	pH值	/	4.0~9.0	8.0	合格	/
5	重金属含量 (Heavy Metal Content)	mg/kg	≤100	符合 (conform)	合格 (Qualified)	/
6	耐热性能 (Heat Resistance)	/	无变形 (No deformation)	符合 (conform)	合格 (Qualified)	/
7	耐洗性能 (Wash Resistance)	/	无褪色 (No fading)	符合 (conform)	合格 (Qualified)	/
8	耐摩擦性能 (Abrasion Resistance)	/	无起毛 (No pilling)	符合 (conform)	合格 (Qualified)	/
9	耐光照性能 (Light Resistance)	/	无变色 (No discoloration)	符合 (conform)	合格 (Qualified)	/
10	耐汗液性能 (Sweat Resistance)	/	无变色 (No discoloration)	符合 (conform)	合格 (Qualified)	/
11	耐化妆品性能 (Cosmetics Resistance)	/	无变色 (No discoloration)	符合 (conform)	合格 (Qualified)	/
12	耐紫外线性能 (UV Resistance)	/	无变色 (No discoloration)	符合 (conform)	合格 (Qualified)	/
13	耐盐渍性能 (Salt Resistance)	/	无变色 (No discoloration)	符合 (conform)	合格 (Qualified)	/
14	耐酸性能 (Acid Resistance)	/	无变色 (No discoloration)	符合 (conform)	合格 (Qualified)	/
15	耐碱性能 (Alkali Resistance)	/	无变色 (No discoloration)	符合 (conform)	合格 (Qualified)	/
16	耐氧化性能 (Oxidation Resistance)	/	无变色 (No discoloration)	符合 (conform)	合格 (Qualified)	/
17	耐还原性能 (Reduction Resistance)	/	无变色 (No discoloration)	符合 (conform)	合格 (Qualified)	/
18	耐微生物性能 (Microbial Resistance)	/	无霉变 (No mold)	符合 (conform)	合格 (Qualified)	/
19	耐虫蛀性能 (Insect Resistance)	/	无虫蛀 (No insect damage)	符合 (conform)	合格 (Qualified)	/
20	耐老化性能 (Aging Resistance)	/	无老化 (No aging)	符合 (conform)	合格 (Qualified)	/
21	耐拉伸性能 (Tensile Resistance)	/	无断裂 (No breakage)	符合 (conform)	合格 (Qualified)	/
22	耐弯曲性能 (Bending Resistance)	/	无变形 (No deformation)	符合 (conform)	合格 (Qualified)	/
23	耐折叠性能 (Folding Resistance)	/	无变形 (No deformation)	符合 (conform)	合格 (Qualified)	/
24	耐揉搓性能 (Rubbing Resistance)	/	无变形 (No deformation)	符合 (conform)	合格 (Qualified)	/
25	耐摩擦性能 (Friction Resistance)	/	无起毛 (No pilling)	符合 (conform)	合格 (Qualified)	/
26	耐刮擦性能 (Scratching Resistance)	/	无刮痕 (No scratches)	符合 (conform)	合格 (Qualified)	/
27	耐冲击性能 (Impact Resistance)	/	无变形 (No deformation)	符合 (conform)	合格 (Qualified)	/
28	耐碰撞性能 (Collision Resistance)	/	无变形 (No deformation)	符合 (conform)	合格 (Qualified)	/
29	耐挤压性能 (Compression Resistance)	/	无变形 (No deformation)	符合 (conform)	合格 (Qualified)	/
30	耐拉伸性能 (Tensile Resistance)	/	无断裂 (No breakage)	符合 (conform)	合格 (Qualified)	/
31	耐弯曲性能 (Bending Resistance)	/	无变形 (No deformation)	符合 (conform)	合格 (Qualified)	/
32	耐折叠性能 (Folding Resistance)	/	无变形 (No deformation)	符合 (conform)	合格 (Qualified)	/
33	耐揉搓性能 (Rubbing Resistance)	/	无变形 (No deformation)	符合 (conform)	合格 (Qualified)	/
34	耐摩擦性能 (Friction Resistance)	/	无起毛 (No pilling)	符合 (conform)	合格 (Qualified)	/
35	耐刮擦性能 (Scratching Resistance)	/	无刮痕 (No scratches)	符合 (conform)	合格 (Qualified)	/
36	耐冲击性能 (Impact Resistance)	/	无变形 (No deformation)	符合 (conform)	合格 (Qualified)	/
37	耐碰撞性能 (Collision Resistance)	/	无变形 (No deformation)	符合 (conform)	合格 (Qualified)	/
38	耐挤压性能 (Compression Resistance)	/	无变形 (No deformation)	符合 (conform)	合格 (Qualified)	/
39	耐拉伸性能 (Tensile Resistance)	/	无断裂 (No breakage)	符合 (conform)	合格 (Qualified)	/
40	耐弯曲性能 (Bending Resistance)	/	无变形 (No deformation)	符合 (conform)	合格 (Qualified)	/
41	耐折叠性能 (Folding Resistance)	/	无变形 (No deformation)	符合 (conform)	合格 (Qualified)	/
42	耐揉搓性能 (Rubbing Resistance)	/	无变形 (No deformation)	符合 (conform)	合格 (Qualified)	/
43	耐摩擦性能 (Friction Resistance)	/	无起毛 (No pilling)	符合 (conform)	合格 (Qualified)	/
44	耐刮擦性能 (Scratching Resistance)	/	无刮痕 (No scratches)	符合 (conform)	合格 (Qualified)	/
45	耐冲击性能 (Impact Resistance)	/	无变形 (No deformation)	符合 (conform)	合格 (Qualified)	/
46	耐碰撞性能 (Collision Resistance)	/	无变形 (No deformation)	符合 (conform)	合格 (Qualified)	/
47	耐挤压性能 (Compression Resistance)	/	无变形 (No deformation)	符合 (conform)	合格 (Qualified)	/
48	耐拉伸性能 (Tensile Resistance)	/	无断裂 (No breakage)	符合 (conform)	合格 (Qualified)	/
49	耐弯曲性能 (Bending Resistance)	/	无变形 (No deformation)	符合 (conform)	合格 (Qualified)	/
50	耐折叠性能 (Folding Resistance)	/	无变形 (No deformation)	符合 (conform)	合格 (Qualified)	/
51	耐揉搓性能 (Rubbing Resistance)	/	无变形 (No deformation)	符合 (conform)	合格 (Qualified)	/
52	耐摩擦性能 (Friction Resistance)	/	无起毛 (No pilling)	符合 (conform)	合格 (Qualified)	/
53	耐刮擦性能 (Scratching Resistance)	/	无刮痕 (No scratches)	符合 (conform)	合格 (Qualified)	/
54	耐冲击性能 (Impact Resistance)	/	无变形 (No deformation)	符合 (conform)	合格 (Qualified)	/
55	耐碰撞性能 (Collision Resistance)	/	无变形 (No deformation)	符合 (conform)	合格 (Qualified)	/
56	耐挤压性能 (Compression Resistance)	/	无变形 (No deformation)	符合 (conform)	合格 (Qualified)	/
57	耐拉伸性能 (Tensile Resistance)	/	无断裂 (No breakage)	符合 (conform)	合格 (Qualified)	/
58	耐弯曲性能 (Bending Resistance)	/	无变形 (No deformation)	符合 (conform)	合格 (Qualified)	/
59	耐折叠性能 (Folding Resistance)	/	无变形 (No deformation)	符合 (conform)	合格 (Qualified)	/
60	耐揉搓性能 (Rubbing Resistance)	/	无变形 (No deformation)	符合 (conform)	合格 (Qualified)	/
61	耐摩擦性能 (Friction Resistance)	/	无起毛 (No pilling)	符合 (conform)	合格 (Qualified)	/
62	耐刮擦性能 (Scratching Resistance)	/	无刮痕 (No scratches)	符合 (conform)	合格 (Qualified)	/
63	耐冲击性能 (Impact Resistance)	/	无变形 (No deformation)	符合 (conform)	合格 (Qualified)	/
64	耐碰撞性能 (Collision Resistance)	/	无变形 (No deformation)	符合 (conform)	合格 (Qualified)	/
65	耐挤压性能 (Compression Resistance)	/	无变形 (No deformation)	符合 (conform)	合格 (Qualified)	/
66	耐拉伸性能 (Tensile Resistance)	/	无断裂 (No breakage)	符合 (conform)	合格 (Qualified)	/
67	耐弯曲性能 (Bending Resistance)	/	无变形 (No deformation)	符合 (conform)	合格 (Qualified)	/
68	耐折叠性能 (Folding Resistance)	/	无变形 (No deformation)	符合 (conform)	合格 (Qualified)	/
69	耐揉搓性能 (Rubbing Resistance)	/	无变形 (No deformation)	符合 (conform)	合格 (Qualified)	/
70	耐摩擦性能 (Friction Resistance)	/	无起毛 (No pilling)	符合 (conform)	合格 (Qualified)	/
71	耐刮擦性能 (Scratching Resistance)	/	无刮痕 (No scratches)	符合 (conform)	合格 (Qualified)	/
72	耐冲击性能 (Impact Resistance)	/	无变形 (No deformation)	符合 (conform)	合格 (Qualified)	/
73	耐碰撞性能 (Collision Resistance)	/	无变形 (No deformation)	符合 (conform)	合格 (Qualified)	/
74	耐挤压性能 (Compression Resistance)	/	无变形 (No deformation)	符合 (conform)	合格 (Qualified)	/
75	耐拉伸性能 (Tensile Resistance)	/	无断裂 (No breakage)	符合 (conform)	合格 (Qualified)	/
76	耐弯曲性能 (Bending Resistance)	/	无变形 (No deformation)	符合 (conform)	合格 (Qualified)	/
77	耐折叠性能 (Folding Resistance)	/	无变形 (No deformation)	符合 (conform)	合格 (Qualified)	/
78	耐揉搓性能 (Rubbing Resistance)	/	无变形 (No deformation)	符合 (conform)	合格 (Qualified)	/
79	耐摩擦性能 (Friction Resistance)	/	无起毛 (No pilling)	符合 (conform)	合格 (Qualified)	/
80	耐刮擦性能 (Scratching Resistance)	/	无刮痕 (No scratches)	符合 (conform)	合格 (Qualified)	/
81	耐冲击性能 (Impact Resistance)	/	无变形 (No deformation)	符合 (conform)	合格 (Qualified)	/
82	耐碰撞性能 (Collision Resistance)	/	无变形 (No deformation)	符合 (conform)	合格 (Qualified)	/
83	耐挤压性能 (Compression Resistance)	/	无变形 (No deformation)	符合 (conform)	合格 (Qualified)	/
84	耐拉伸性能 (Tensile Resistance)	/	无断裂 (No breakage)	符合 (conform)	合格 (Qualified)	/
85	耐弯曲性能 (Bending Resistance)	/	无变形 (No deformation)	符合 (conform)	合格 (Qualified)	/
86	耐折叠性能 (Folding Resistance)	/	无变形 (No deformation)	符合 (conform)	合格 (Qualified)	/
87	耐揉搓性能 (Rubbing Resistance)	/	无变形 (No deformation)	符合 (conform)	合格 (Qualified)	/
88	耐摩擦性能 (Friction Resistance)	/	无起毛 (No pilling)	符合 (conform)	合格 (Qualified)	/
89	耐刮擦性能 (Scratching Resistance)	/	无刮痕 (No scratches)	符合 (conform)	合格 (Qualified)	/
90	耐冲击性能 (Impact Resistance)	/	无变形 (No deformation)	符合 (conform)	合格 (Qualified)	/
91	耐碰撞性能 (Collision Resistance)	/	无变形 (No deformation)	符合 (conform)	合格 (Qualified)	/
92	耐挤压性能 (Compression Resistance)	/	无变形 (No deformation)	符合 (conform)	合格 (Qualified)	/
93	耐拉伸性能 (Tensile Resistance)	/	无断裂 (No breakage)	符合 (conform)	合格 (Qualified)	/
94	耐弯曲性能 (Bending Resistance)	/	无变形 (No deformation)	符合 (conform)	合格 (Qualified)	/
95	耐折叠性能 (Folding Resistance)	/	无变形 (No deformation)	符合 (conform)	合格 (Qualified)	/
96	耐揉搓性能 (Rubbing Resistance)	/	无变形 (No deformation)	符合 (conform)	合格 (Qualified)	/
97	耐摩擦性能 (Friction Resistance)	/	无起毛 (No pilling)	符合 (conform)	合格 (Qualified)	/
98	耐刮擦性能 (Scratching Resistance)	/	无刮痕 (No scratches)	符合 (conform)	合格 (Qualified)	/
99	耐冲击性能 (Impact Resistance)	/	无变形 (No deformation)	符合 (conform)	合格 (Qualified)	/
100	耐碰撞性能 (Collision Resistance)	/	无变形 (No deformation)	符合 (conform)	合格 (Qualified)	/

国家发制品及护发用品质量监督检验中心						发 售 凭 证	
Inspection Report						№ 20160206	
产品名称(Sample): 人发发套 (Human Hair Weaving)						规格型号(Model): 14"(1+ inch)	
序号 Serial	检验项目 Items	计量单位 Unit	标准要求 Requirements	检测结果 Results	判定结论 Conclusions	备注 Remarks	
1	人发含量 (Human Hair Content)	%	≥98	100	合格 (Qualified)	/	
2	甲醛 (Formaldehyde)	mg/kg	≤15	5	合格 (Qualified)	/	
3	异味 (Off-flavor)	/	无异味 (None)	符合 (conform)	合格 (Qualified)	/	
4	pH值	/	4.0~9.0	8.0	合格	/	
5	可溶性重金属 (Soluble Heavy Metals)	mg/kg	≤100	符合 (conform)	合格 (Qualified)	/	
6	总砷 (Total Arsenic)	mg/kg	≤10	符合 (conform)	合格 (Qualified)	/	
7	总汞 (Total Mercury)	mg/kg	≤1	符合 (conform)	合格 (Qualified)	/	
8	总铅 (Total Lead)	mg/kg	≤100	符合 (conform)	合格 (Qualified)	/	
9	总铬 (Total Chromium)	mg/kg	≤10	符合 (conform)	合格 (Qualified)	/	
10	总镉 (Total Cadmium)	mg/kg	≤1	符合 (conform)	合格 (Qualified)	/	
11	总铜 (Total Copper)	mg/kg	≤100	符合 (conform)	合格 (Qualified)	/	
12	总镍 (Total Nickel)	mg/kg	≤10	符合 (conform)	合格 (Qualified)	/	
13	总锰 (Total Manganese)	mg/kg	≤100	符合 (conform)	合格 (Qualified)	/	
14	总锌 (Total Zinc)	mg/kg	≤100	符合 (conform)	合格 (Qualified)	/	
15	总铁 (Total Iron)	mg/kg	≤100	符合 (conform)	合格 (Qualified)	/	
16	总铝 (Total Aluminum)	mg/kg	≤100	符合 (conform)	合格 (Qualified)	/	
17	总硅 (Total Silicon)	mg/kg	≤100	符合 (conform)	合格 (Qualified)	/	
18	总磷 (Total Phosphorus)	mg/kg	≤100	符合 (conform)	合格 (Qualified)	/	
19	总氮 (Total Nitrogen)	mg/kg	≤100	符合 (conform)	合格 (Qualified)	/	
20	总硫 (Total Sulfur)	mg/kg	≤100	符合 (conform)	合格 (Qualified)	/	
21	总氯 (Total Chlorine)	mg/kg	≤100	符合 (conform)	合格 (Qualified)	/	
22	总氟 (Total Fluorine)	mg/kg	≤100	符合 (conform)	合格 (Qualified)	/	
23	总溴 (Total Bromine)	mg/kg	≤100	符合 (conform)	合格 (Qualified)	/	
24	总碘 (Total Iodine)	mg/kg	≤100	符合 (conform)	合格 (Qualified)	/	
25	总硒 (Total Selenium)	mg/kg	≤100	符合 (conform)	合格 (Qualified)	/	
26	总钼 (Total Molybdenum)	mg/kg	≤100	符合 (conform)	合格 (Qualified)	/	
27	总钨 (Total Tungsten)	mg/kg	≤100	符合 (conform)	合格 (Qualified)	/	
28	总铋 (Total Bismuth)	mg/kg	≤100	符合 (conform)	合格 (Qualified)	/	
29	总铊 (Total Thallium)	mg/kg	≤100	符合 (conform)	合格 (Qualified)	/	
30	总铋 (Total Bismuth)	mg/kg	≤100	符合 (conform)	合格 (Qualified)	/	
31	总铊 (Total Thallium)	mg/kg	≤100	符合 (conform)	合格 (Qualified)	/	
32	总铋 (Total Bismuth)	mg/kg	≤100	符合 (conform)	合格 (Qualified)	/	
33	总铊 (Total Thallium)	mg/kg	≤100	符合 (conform)	合格 (Qualified)	/	
34	总铋 (Total Bismuth)	mg/kg	≤100	符合 (conform)	合格 (Qualified)	/	
35	总铊 (Total Thallium)	mg/kg	≤100	符合 (conform)	合格 (Qualified)	/	
36	总铋 (Total Bismuth)	mg/kg	≤100	符合 (conform)	合格 (Qualified)	/	
37	总铊 (Total Thallium)	mg/kg	≤100	符合 (conform)	合格 (Qualified)	/	
38	总铋 (Total Bismuth)	mg/kg	≤100	符合 (conform)	合格 (Qualified)	/	
39	总铊 (Total Thallium)	mg/kg	≤100	符合 (conform)	合格 (Qualified)	/	
40	总铋 (Total Bismuth)	mg/kg	≤100	符合 (conform)	合格 (Qualified)	/	
41	总铊 (Total Thallium)	mg/kg	≤100	符合 (conform)	合格 (Qualified)	/	
42	总铋 (Total Bismuth)	mg/kg	≤100	符合 (conform)	合格 (Qualified)	/	
43	总铊 (Total Thallium)	mg/kg	≤100	符合 (conform)	合格 (Qualified)	/	
44	总铋 (Total Bismuth)	mg/kg	≤100	符合 (conform)	合格 (Qualified)	/	
45	总铊 (Total Thallium)	mg/kg	≤100	符合 (conform)	合格 (Qualified)	/	
46	总铋 (Total Bismuth)	mg/kg	≤100	符合 (conform)	合格 (Qualified)	/	
47	总铊 (Total Thallium)	mg/kg	≤100	符合 (conform)	合格 (Qualified)	/	
48	总铋 (Total Bismuth)	mg/kg	≤100	符合 (conform)	合格 (Qualified)	/	
49	总铊 (Total Thallium)	mg/kg	≤100	符合 (conform)	合格 (Qualified)	/	
50	总铋 (Total Bismuth)	mg/kg	≤100	符合 (conform)	合格 (Qualified)	/	




Shipping

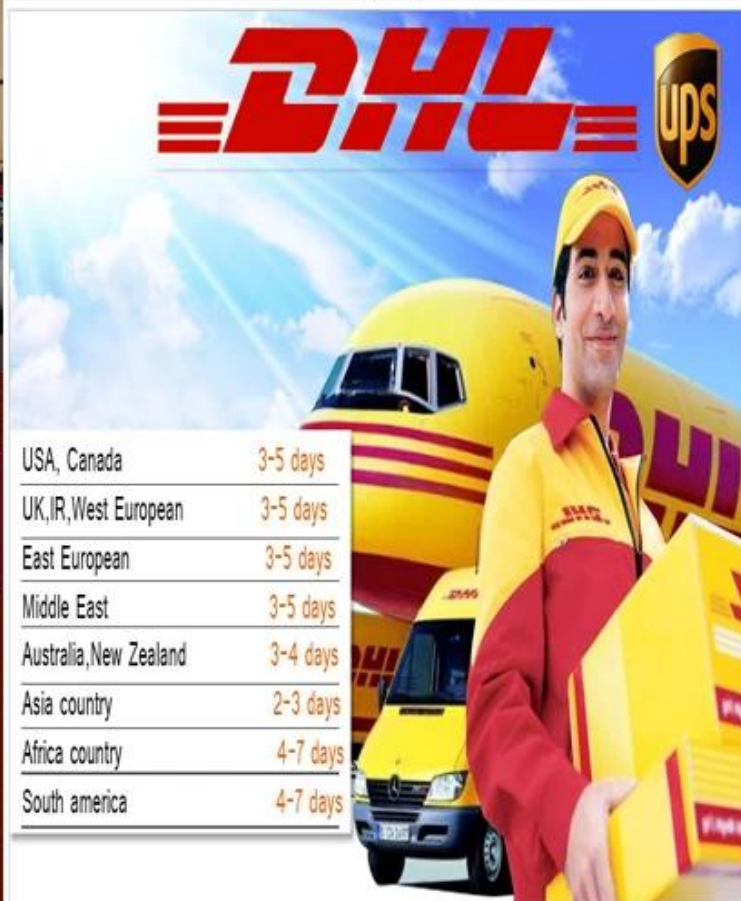

The image shows the DHL and UPS logos at the top. Below them is a DHL delivery person in a yellow and red uniform, holding a yellow DHL box. In the background is a yellow DHL truck. To the left of the person is a table with shipping times for various regions.

USA, Canada	3-5 days
UK,IR,West European	3-5 days
East European	3-5 days
Middle East	3-5 days
Australia,New Zealand	3-4 days
Asia country	2-3 days
Africa country	4-7 days
South america	4-7 days

Free Shipping, Order Will Be Posted By DHL Or UPS Usually.
Normally Item Will Arrive Within 3-7 Working Day After Being Posted.

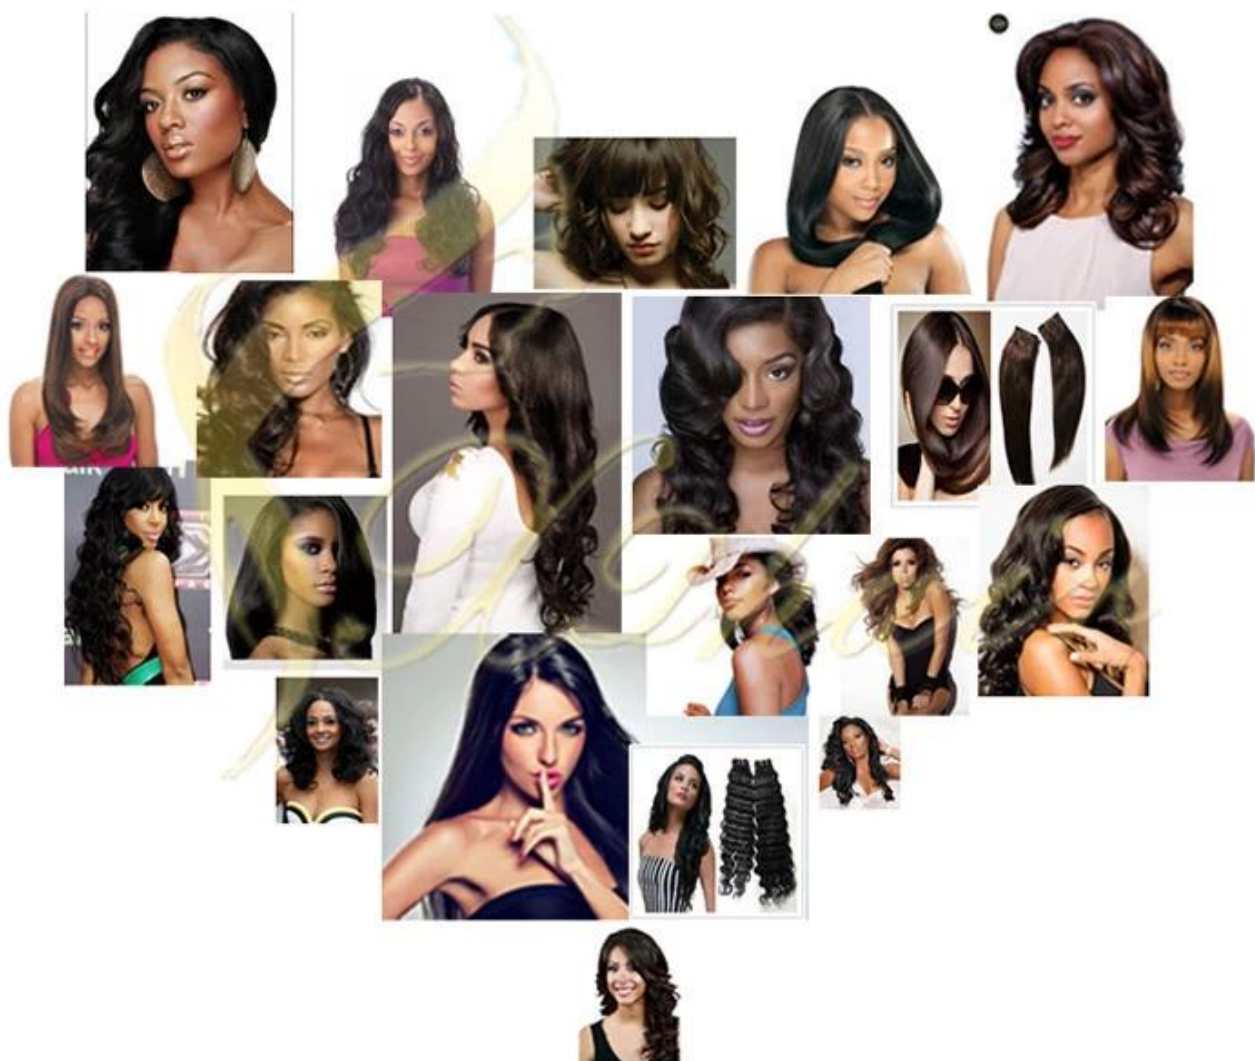

FAQ

Q 1: What's Virgin Hair ?



Raw Material



Virgin Hair



No Dyed



No Acid Bath

Q 2: Why Are My Hair Extensions Getting Tangle ?

A: Your Hair Extensions can tangle due to dryness, oil & dirt build-up, salt water, chlorine and not combing (wide tooth comb) out your hair daily
Make sure to wash & condition your hair at least once a week, twice a week is better. Use hydrating drops or consult your stylist for more help.

Q 3: Why Are My Hair Extensions Getting Shedding ?

A: Firstly, PLS running the with your finers or Wide-toothed gently, to prevent the shedding. For curly hair, pls don't use the comb.
Secondly, After wash pls nurse the hair with some hair oil, then the hair will be silk and soft.



After Washing The Hair, please Nurse With Some Hair Oil, then The Hair Will Be Silky And Soft.



Choose The Wide-toothed Comb; Comb It Gently, so As To Prevent Shedding.



Too Much Heat May Damage The Hair.

Q 4: Could The Hair Be Dyed And Iron-flat ?

A: It is virgin hair, so could be dyed and iron-flat, iron flat pls don't exceed 150C, or the hair will be destroyed. Also the hair will come back to its natural wavy after you wash it or iron-flat.

Q 5: How Many Bundles For A Full Head ?

A: Here are the picture in the length between difference Texture.

Straight

Wavy

Curly



Length (Inch)	12"	14"	16"	18"	20"	22"	24"	26"	28"	30"
	20cm	35cm	40cm	45cm	50cm	55cm	60cm	70cm	75cm	80cm
One Standard Head (Bundle)	2	2	3	3	3	3	4	4	4	4